


## Accessories

### PVC mouldings

Available in 2.44 m lengths in white.



Inside Corner



Outside Corner



Division Bar



Top Finish

### Aluminium moulding

Available in 2.44 m lengths.



Inside Corner A551



Outside Corner A560



Division Bar A565



Top Finish A570

### Installation



Apply adhesive to the wall and place the panels on the corresponding wall.

Place small nails loosely between the panels.

Protect the front part of the panels with adhesive tape to prevent staining.

Inject polyester resin into the groove left between the panels.

After 4 or 5 minutes, pass a spatula to remove excess resin.

After half an hour, remove the tape to expose the panels and the sealed joint.

## Stabilit

Stabilit, a division of the Verzatec Group, is a leading company in the manufacture of fibreglass reinforced plastic laminates. It is committed to excellence and strives at all times to exceed its customers needs.

Stabilit and Verzatec have dedicated their efforts since 1959 to offering innovative, high value-added solutions to the market. Driven by this philosophy; Verzatec recently acquired Nudo Products Incorporated, which offers high-value solutions

## Symmetrix®


Symmetrix® plastic linings offer superior appearance to ceramic tiles at a competitive price and with significant advantages in terms of installation times and minimal maintenance costs.

## Features and Benefits

- Stain-, scratch- and mould-resistant. Does not crack or split and the joint does not deteriorate over time as with ceramic tile grout.
- Offers great impact resistance due to its fibreglass core.
- Easy to clean with no need for brushes or special tools.
- Does not break or split.
- Cheaper than some ceramic tile options.
- Installation is significantly faster than tiles.
- Available in 1.22 m x 2.44 m x 2.4 mm (0/90).

## Sani-Coat coating

The innovative Sani-Coat coating applied to the sheet seals the material surface and offers numerous advantages over traditional ceramic tile grout lines.

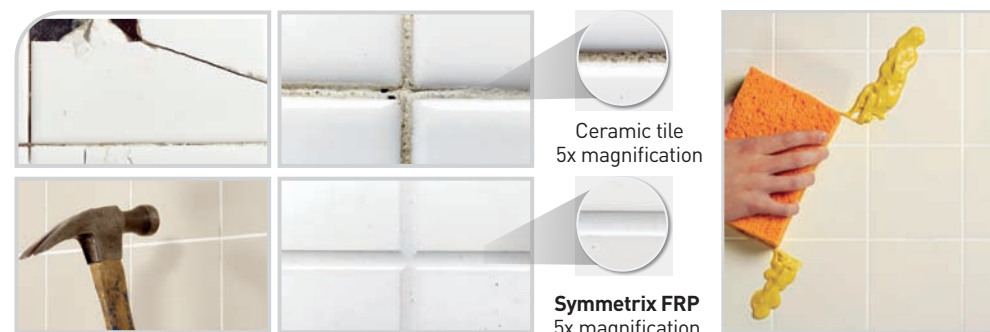

Complies with ASTM D3273-94, D3274-95 standard

in finishes for construction which are ideal for commercial applications such as kitchens, bathrooms, dining areas and in general any space where ceramic tiles are used.



## Symmetrix® finishes available



C 100 G44  
FRP White

C 100 G63  
White (rectangular type)

## Symmetrix® finishes available to order



C 140 G44  
Ivory

C 145 G44  
Silver

C 105 G44  
Black

C 131 G44  
Everglade

C 133 G44  
Periwinkle


## Artizan® FRP

The composition of Artizan FRP makes it an attractive wall covering with all the advantages of FRP in installation time and maintenance at a competitive price. Its central components, as well as the melamine-based surface elements, create a hard-wearing, resistant product that is good to look at.




## Features and Benefits

- Finishes for walls capable of creating various environments.
- Impact-, stain-, bacteria- and mould-resistant and does not crack.
- Competitive price compared to tiles, HPL and vinyl materials.
- Cleaning is extremely easy and can be performed with simple methods.
- Available in 1.22 m x 2.44 m x 2.4 mm (0/90).

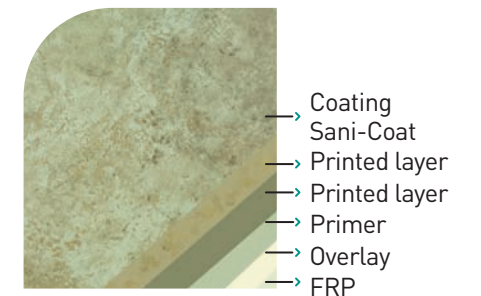

## Artizan® finishes available

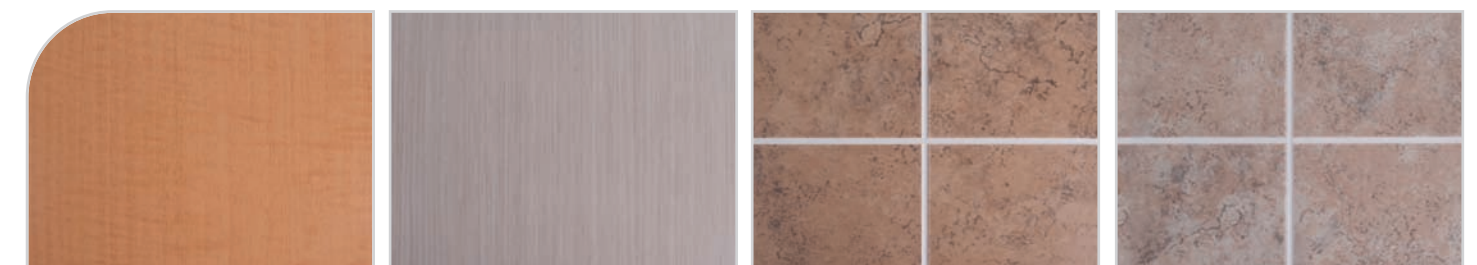

148 Monticello  
Anigre

5408 Monterey  
Sand

T939-G44 Verona  
"4 - 3 mm joint in white"

T938-G44 Tuscany  
"4 - 3 mm joint in white"

\*Additional finishes available upon request